




Dixon Sanitary Bradford[™] Centrifugal Pumps BC-Series





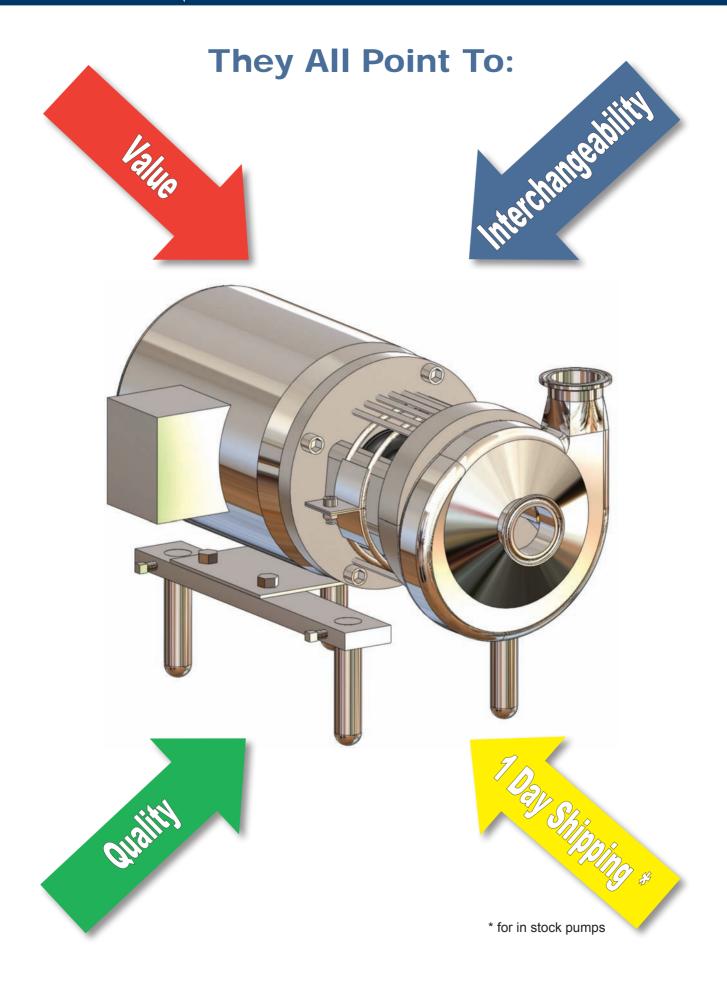

Dairy



Oils



Water



Vinegar




Cosmetics




Testing:


- All assembled pumps are hydrostatically tested.
- Certified performance curves are available.

Bradford[™] BC-Series Sanitary Centrifugal Pump

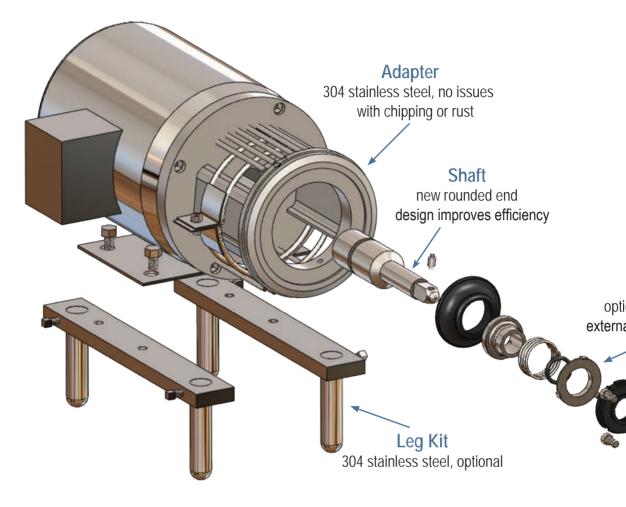

Model	Inlet	Outlet	Maximum Impeller
BC114	1½" or 2"	1½"	4"
BC216	2" or 21⁄2"	1½"	6"
BC218	2" or 3"	1½"	8"
BC328	3" or 4"	2"	8"

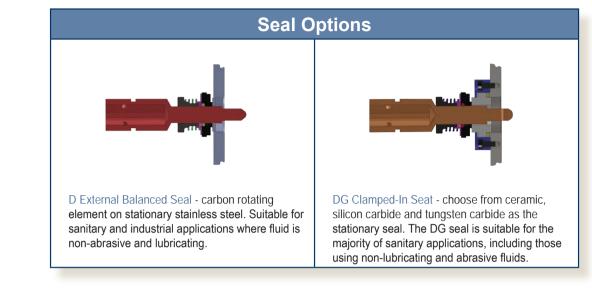

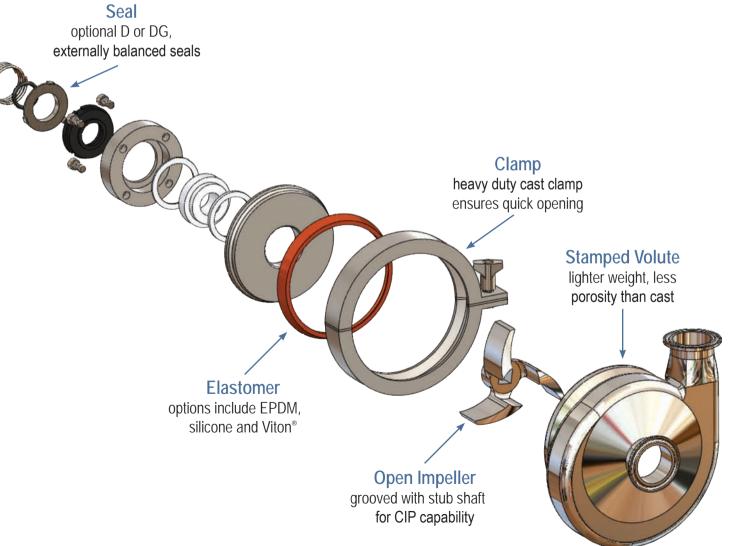


icy

Mechanical Specifications

Standard Construction

- Volute: 316L stainless steel
- Impeller: CF8M (316) stainless steel
- Backplate: 316L stainless steel
- Stub Shaft: 316L stainless steel
- Adapter: 304 stainless steel
- Optional Leg Kit: 304 stainless steel
- Seal Types: externally balanced 'D' & 'DG' with clamped in seat
- Rotary Seal Material: carbon
- DG Seal Seat Material: silicon carbide, ceramic and tungsten carbide
- Elastomers: EPDM, silicone and Viton®
- Finish: sanitary polish 32RA






Performance Characteristics

- Nominal Capacity: up to 780 GPM
- Temperature: 32°F to 212°F, consult factory for other temperatures
- Nominal speed: up to 3500 RPM 60 Hz

Motors and Mounting

- Motor: standard C-face, 1750 & 3450 RPM, TEFC and washdown, foot mounted
- Additional motor types available upon request
- Mounting: pump head mounted to a C-Face motor



Dixon Sanitary

Orders from abroad are with longer delivery times.



Through its divisions and affiliated companies, Dixon is recognized as the premier manufacturer and supplier of hose fittings and accessories spanning a wide range of industrial uses. Dixon's reach includes products for fire protection, food, dairy processing, beverage and brewery, mobile tankers, mining, construction, chemical processing, petroleum, oilfields, refining and manufacturing.